

n Features:

- High frequency transformer design is capable of driving high reactive
- Pure Sine Wave output(THD<3%)
- Power ON/OFF remote control(optional)
- Input & output fully isolation
- Input Protection: Reverse Polarity(Fuse)/Under Voltage/Over Voltage
- Output Protection: Short Circuit / Overload /Over Temperature / Earth Fault / Soft Start
- Germany technology , Made in china
- 100% real power, High surge power,2 year warranty
- E8/CE approved


n Specification:

MODEL		NP3000-112	NP3000-124	NP3000-148	NP3000-212	NP3000-224	NP3000-248
Output	AC Voltage	100/110/120VAC			220/230/240VAC		
	Rated Power	3000W					
	Surge Power	Load 120~150%(3min.);6000W (3sec;resistive)					
	Waveform	Pure Sine Wave(THD<3%)					
	Frequency	50/60Hz ±0.05%					
	AC Regulation	±5%			±10%		
	Power Factor Allowed	COSθ-90°~COSθ+90°					
	Standard Receptacles	USA/British/Franch/Schuko /UK/Australia/Universal etc. optional					
	LED Indicator	Green for power on, red for faulty status					
USB port	5V 500mA	5V 500mA	-----	5V 500mA	5V 500mA	-----	
Input	No Load Current Draw	≤1. 2A	≤0.80A	≤0.70A	≤1.2A	≤0.80A	≤0.70A
	DC Voltage	12VDC	24VDC	48VDC	12VDC	24VDC	48VDC
	Voltage Range	10.5~15VDC	21~30VDC	42~60VDC	10.5~15VDC	21~30VDC	42~60VDC
	Efficiency(Typ.)	89%~93%					
	Fuse	40A×12	20A×12	10A×12	40A×12	20A×12	10A×12
	Remote Control	Function (optional)					
Protection	BAT. Low Alarm	10.5±0.5VDC	21±1.0VDC	42±2.0VDC	10.5±0.5VDC	21±1.0VDC	42±2.0VDC
	BAT. Low Shutdown	10±0.5VDC	20±1.0VDC	40±2.0VDC	10±0.5VDC	20±1.0VDC	40±2.0VDC
	Over Load	Shut down output voltage , restart to recover					
	Over Voltage	15.5±0.5VDC	31±1.0VDC	62±2.0VDC	15.5±0.5VDC	31±1.0VDC	62±2.0VDC
	Over Temperature	Shut down output voltage , recover automatically after temperature goes down					
	Output Short	Shut down output voltage , restart to recover					
	DC Input Reverse Polarity	By fuse					
	Earth Fault	Shut off o/p when the load has electrical leakage					
Soft Start	Yes, 3-5 Seconds						
Environment	Working Temp.	0~+50°C					
	Working Humidity	20~90%RH non-condensing					
	Storage Temp.&Humidity	-30~+70°C,10~95%RH					
Safety & EMC	Safety Standards	Certified UL 458(only for "GFCI" receptacles)			Certified EN 60950-1; 2006+A11: 2009+A1: 2010+A12: 2011+A2: 2013.		
	Isolation Resistance	I/P-O/P:100M Ohms/500VDC					
	EMI Conduction & Radiation	Certified FCC class A			Certified EN 62040-2:2006,EN61000-3-2; EN61000-3-3;		
	EMS Immunity	-----			Certified IEC61000-4-3, IEC61000-4-6		
	E-MARK	-----			Certified ECE RIO.05:2014		
Others	Dimension(L×W×H)	450×252×101mm					
	Packing	8kg;2pcs/17kg/0.07m³					
	Cooling	Load control fan or by thermal control fan					
	Application	Home and Office appliances,Portable Power Equipment,Vehicle,Yacht and Off-Gid Solar power systems...etc.					

Jiaxing Solarway New Energy Co.,Ltd

Address: Building NO.6, PV industrial zone in kanghe road, xiuzhou district, jiaxing city, Zhejiang, China 31400.

Tel : +86-573-83705988 / +86-13819379269












Fax : +86-573-83705966

Email : info@solarway.cc / sales01@solar-way.com

Website : www.solarway.cc

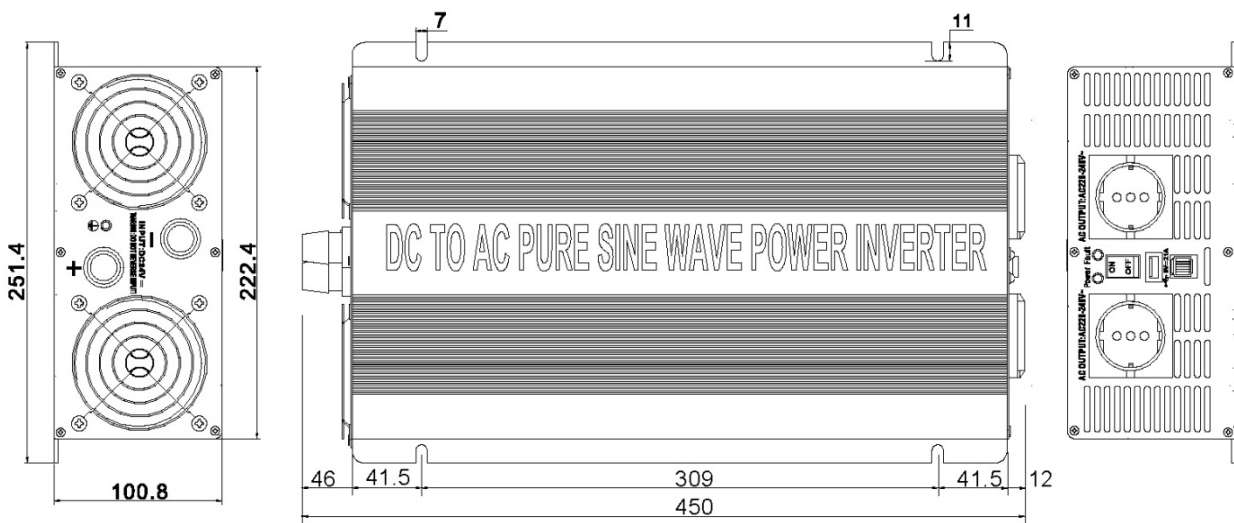
File Name:NP3000-spec 09/08/16

n Socket Type:

										
A	B	C	D	E	F	G	H	I	J	K

n Mechanical Drawings:

Unit:mm



Jiaxing Solarway New Energy Co.,Ltd

Address: Building NO.6, PV industrial zone in kanghe road, xiuzhou district, jiaxing city, Zhejiang, China 31400.

Tel : +86-573-83705988 / +86-13819379269

Fax : +86-573-83705966

Email : info@solarway.cc / sales01@solar-way.com

Website : www.solarway.cc

File Name:NP3000-spec 09/08/16