


Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

3

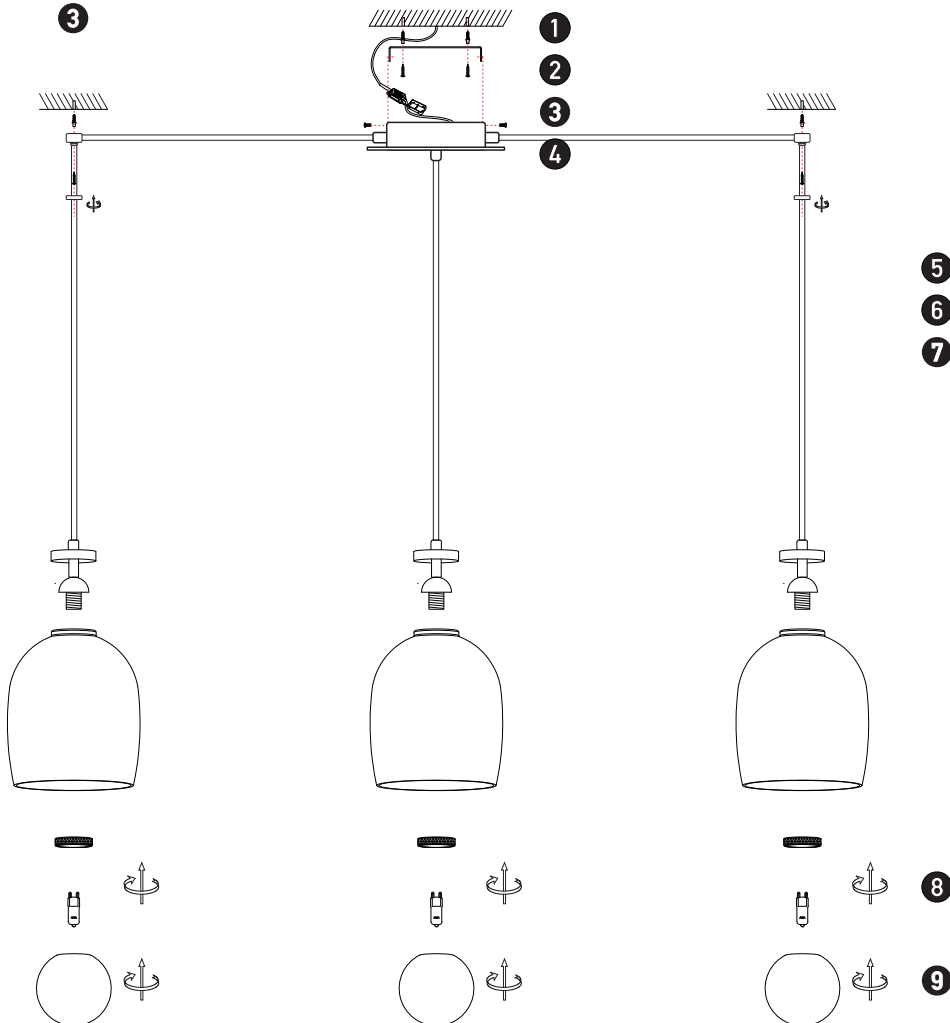

PENDANT LIGHT

22146

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Material:** Metal + Smoked Glass + Opal Glass
- **Lamp type:** 3x G9 Led , MAX 5W / Bulb
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

Electrical products can cause death, injury, or damage to property. Maintenance and installation should only be carried out by a professional electrician.

- Ensure main supply is switched off.
- Insert masonry plugs (1) into mounting surface.
- Fit mounting bracket onto mounting surface with self-tapping screws (2).
- Connect main supply wires to terminal block (3) making sure all connections are tight.
- Fit ceiling plate onto mounting bracket with screws (4).
- The light is adjustable, place the cables in the position that works for you.
- Insert masonry plugs (5) into mounting surface, repeat two times.
- Fit mounting bracket onto mounting surface with self-tapping screws (6), repeat two times.
- Pass the cable through the hanging accessories and secure by screwing the safety caps (7), repeat two times.
- Use the rings to secure all glass shades on the lamp-holders (8).
- Install all G9 LED lamps into the lamp-holders, finally add the opal glasses (9).
- Reconnect power.

WARNING

- Make sure that the products is installed properly before connecting to electricity.
- Do not cover the fitting.
- Not for outdoor use or in wet conditions.
- Do not exceed the maximum wattage rating of the lamp.

